
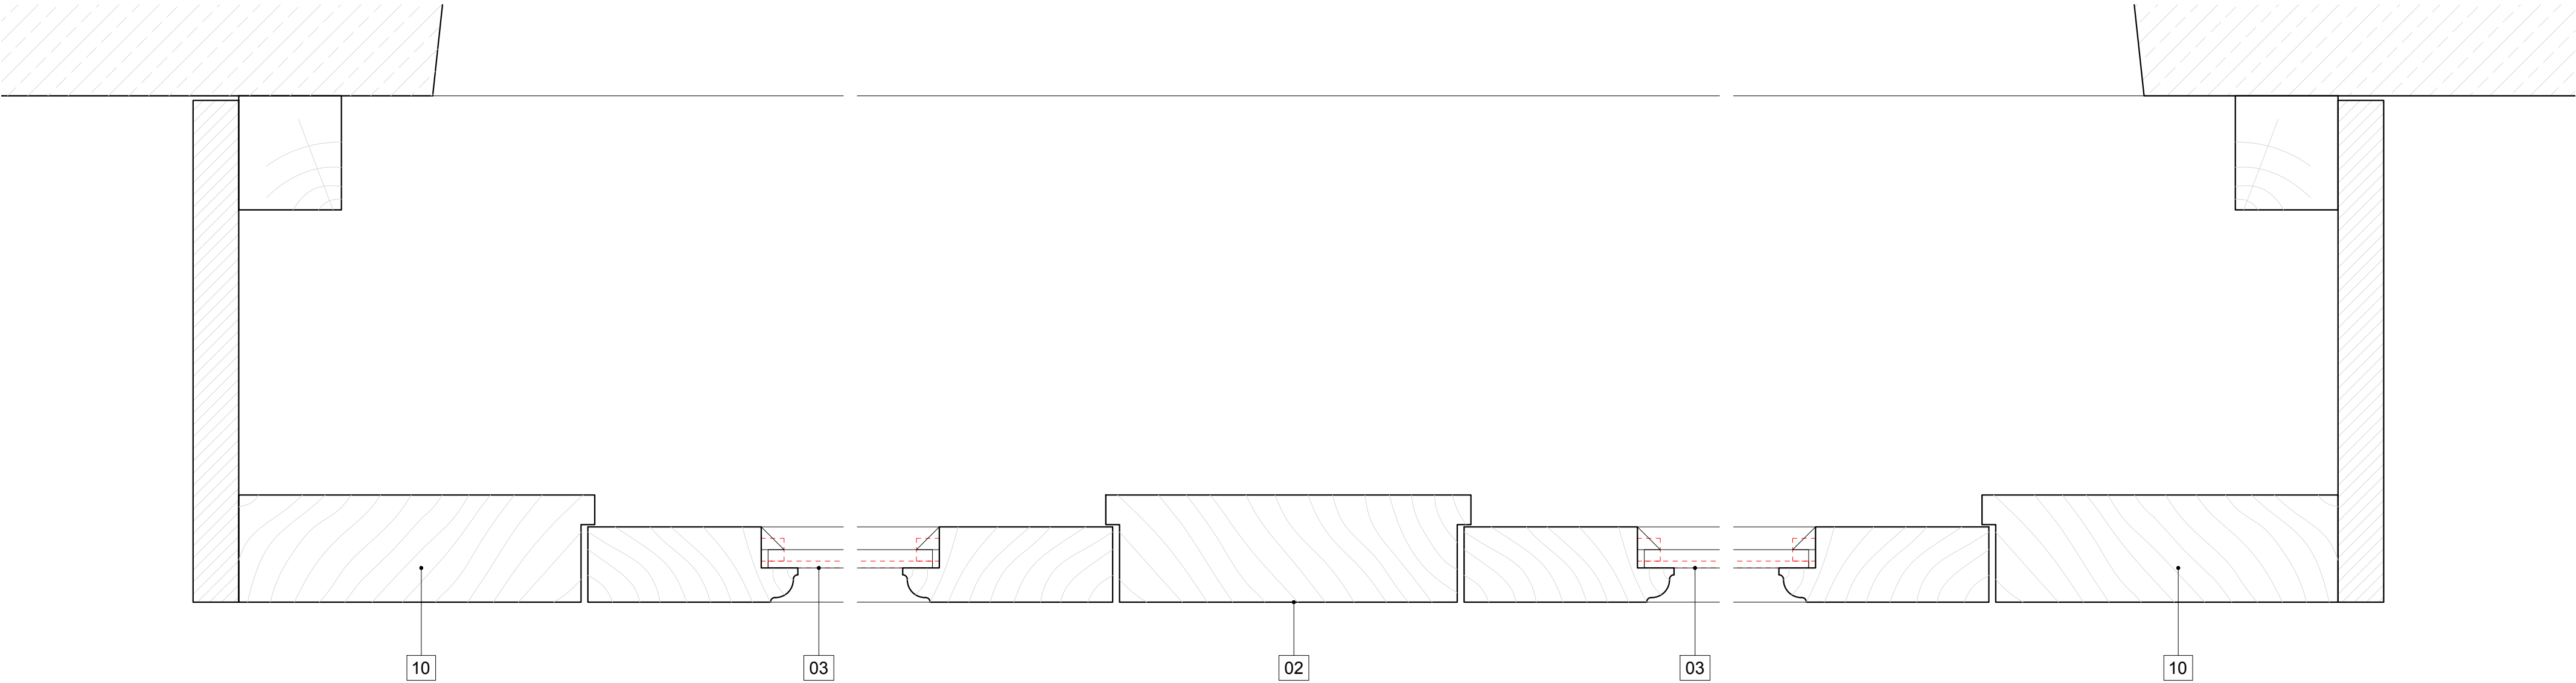


NOTES TO DRAWING

- 1) M60: Existing timber frames to be lightly sanded and cleaned in preparation of new decorations. Traditional oil gloss finishes to be applied to all visible timberwork.
- 2) C51: Scarf in timber repair to the central door mullions in each clock case opening.
- 3) L40: Existing fibreglass and modern beading to be carefully removed in the clock case doors and replaced with 8mm MONO laminated safety glass to BS EN 12600 and BS EN 356 by Histoglass in a hand-drawn glass finish. Glazing to be secured using linseed oil putty and glazing sprigs

- 4) 50 x 100mm planed kiln dried oak framing to be installed to support the new lead roof.
- 5) 25 x 50mm planed kiln dried oak framing with heavy gauge stainless steel mesh installed to provide ventilation and bird protection against the existing timber louvres.
- 6) 50 x 100mm planed kiln dried oak framing with heavy gauge stainless steel mesh installed to provide ventilation and bird protection against the existing timber louvres. Bottom rail to form upstand for new lead flashing as H71.

- 7) New ex 150 x 32mm treated SW timber boards to be penny gap and installed to a 1:50 fall minimum.
- 8) H71: New Code 6 lead flat roof to provide weather tray against the louvres and protect the clock cases joinery below. Lead to be formed in maximum bays of 675mm wide between the joints with 45 x 45mm wood-cored rolls forming joints. Front edge to be dressed down face, welled and clipped. Code 6 cover flashing to be provided at the abutment with the new oak frame and flashing to be welled at the head.

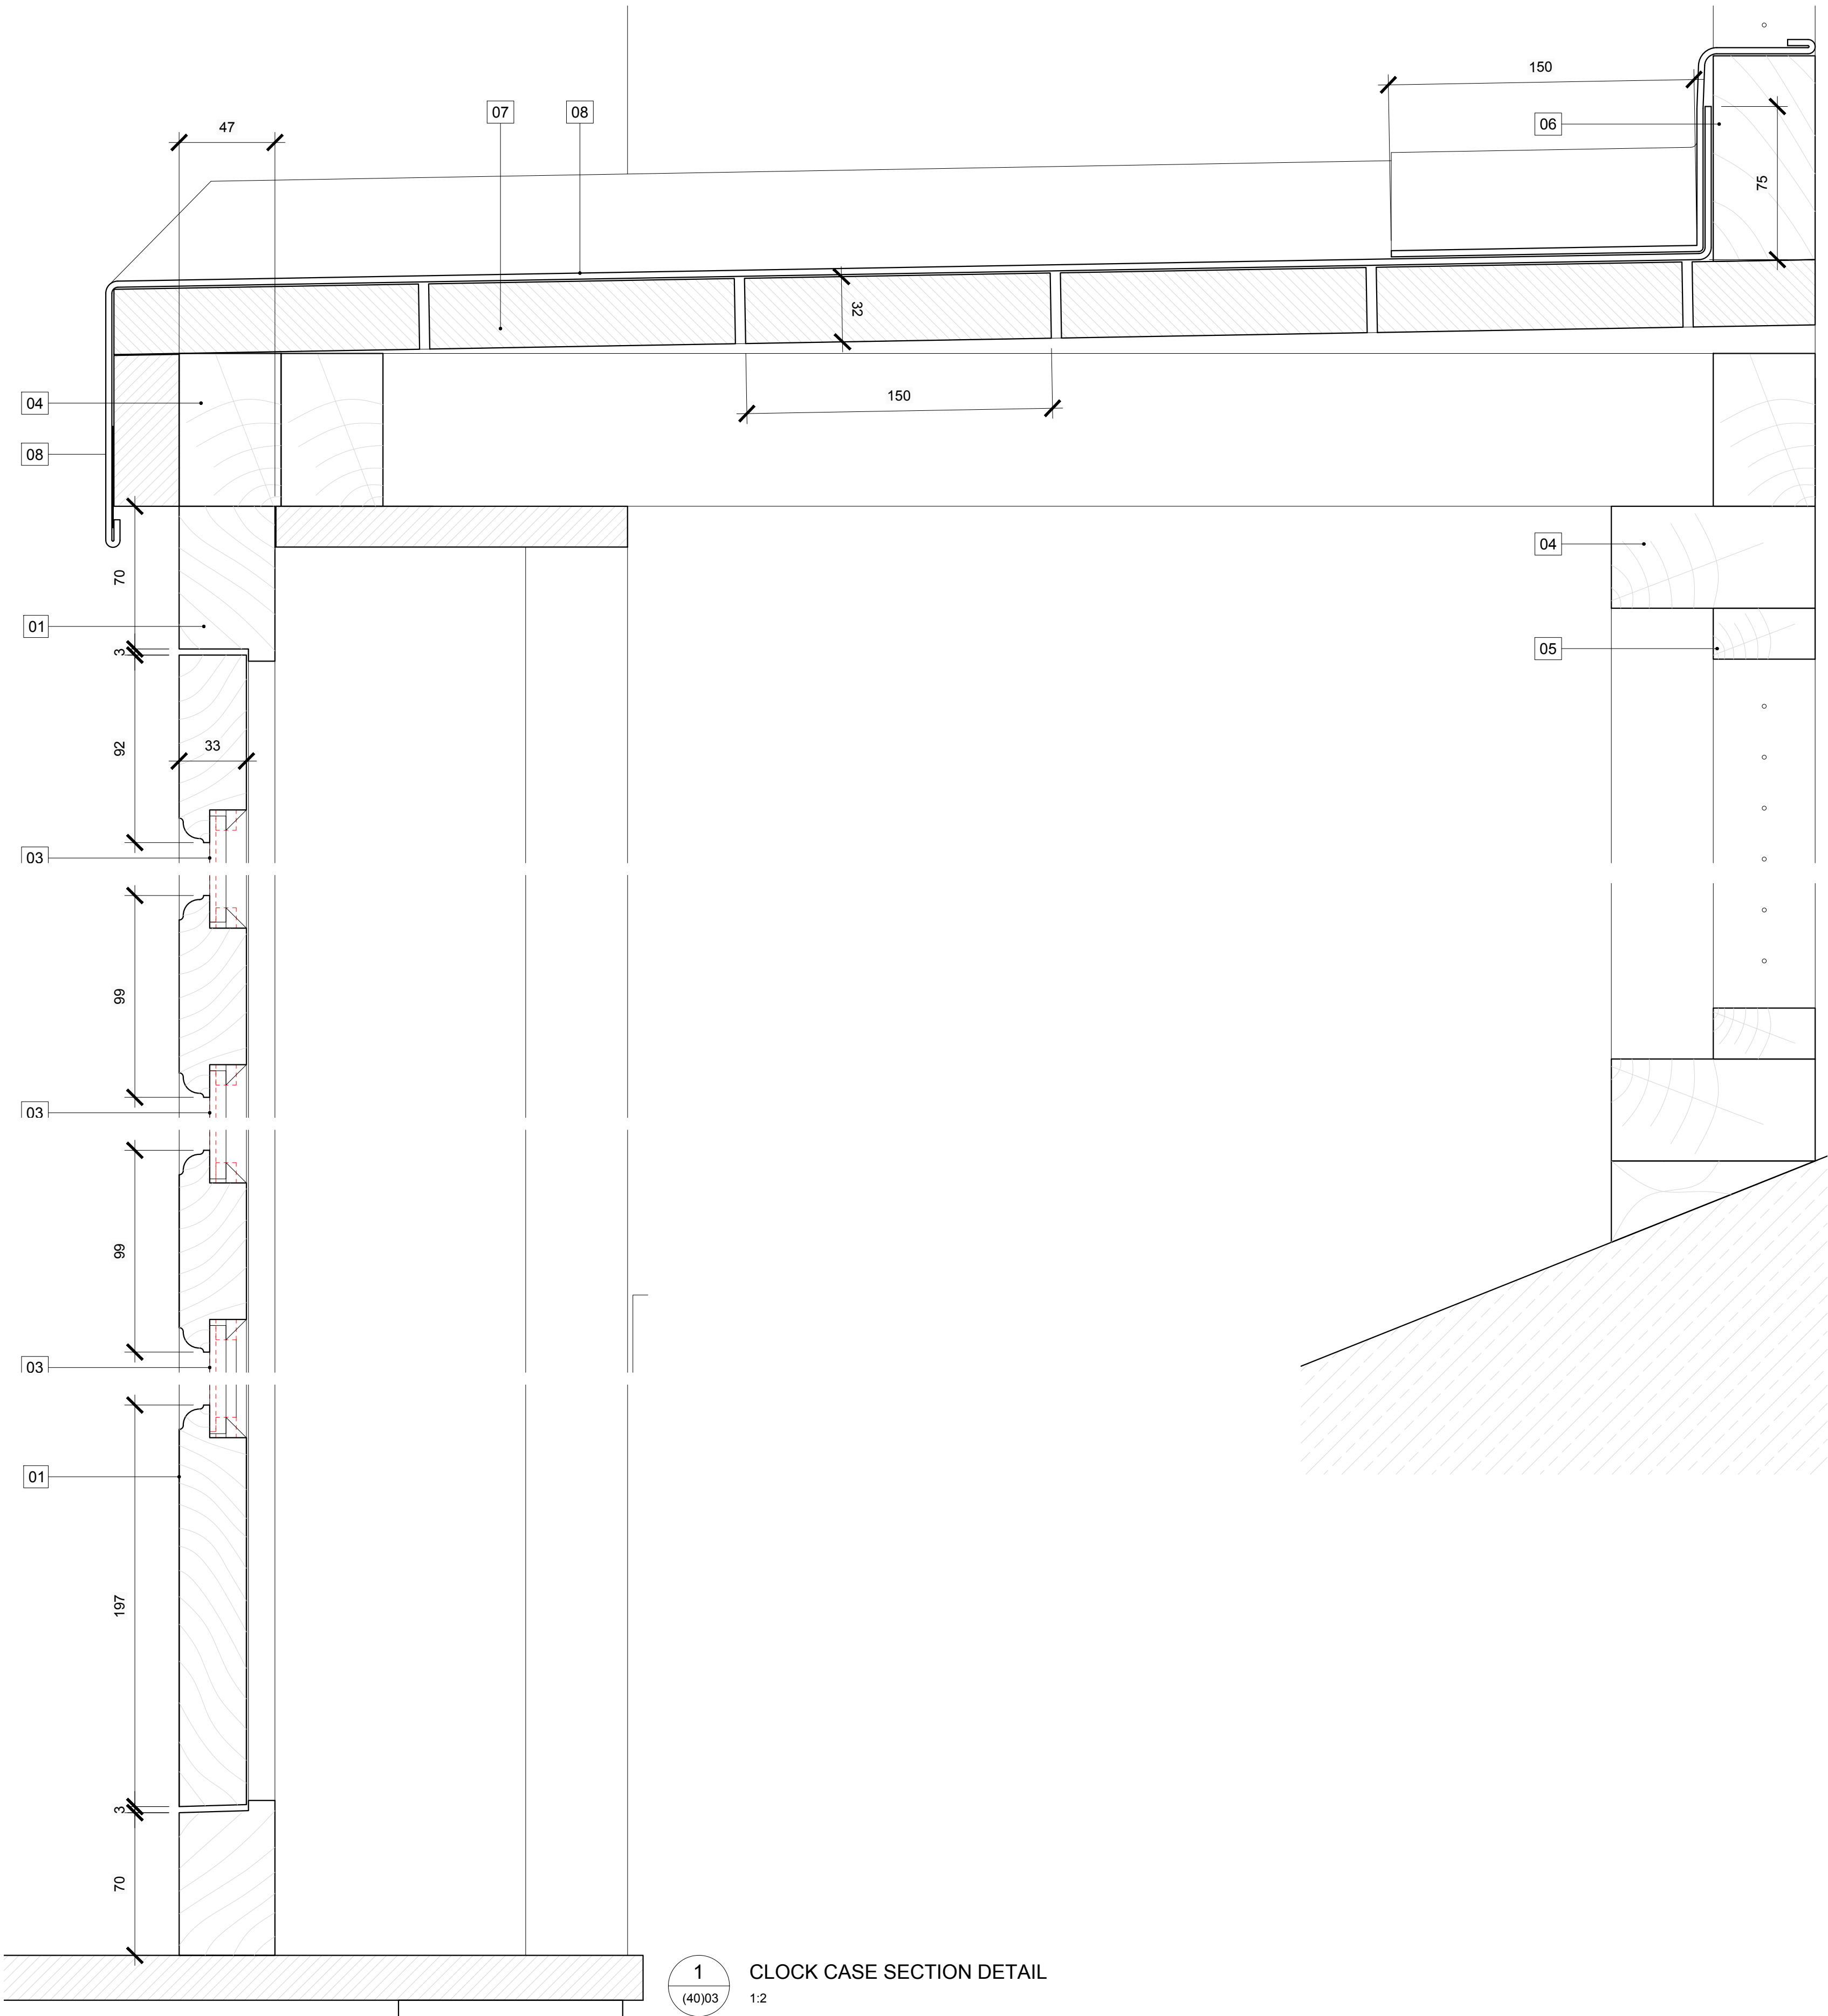

2
(40)03
1:2
CLOCK CASE PLAN DETAIL

(Do not scale for construction purposes. The contractor shall check and verify all dimensions on site before ordering any components or fittings and any such are to be installed to the manufacturer's recommended details. Please note that these Building Regulations drawings show design intent only and construction is the responsibility of the contractor. All drawings are copyright of Dey Architects and shall not be reproduced without their consent.)

Studios 12-13, 9 Bath Buildings, Bristol, BS6 5PT
E info@dhva.co.uk W www.dhva.co.uk T 0117 914 6317

Job Title
Coleford Clock Tower

Client
Coleford Town Council

Scale
1:2 @ A1

Drawn
OF

Checked
OF

ISSUED FOR TENDER

dittrichhudsonvasettiarchitects

Dwg Title
Second Floor Details as Proposed

Job No
1398

Dwg No
(40)03

Rev